


Details

Ridge Detail

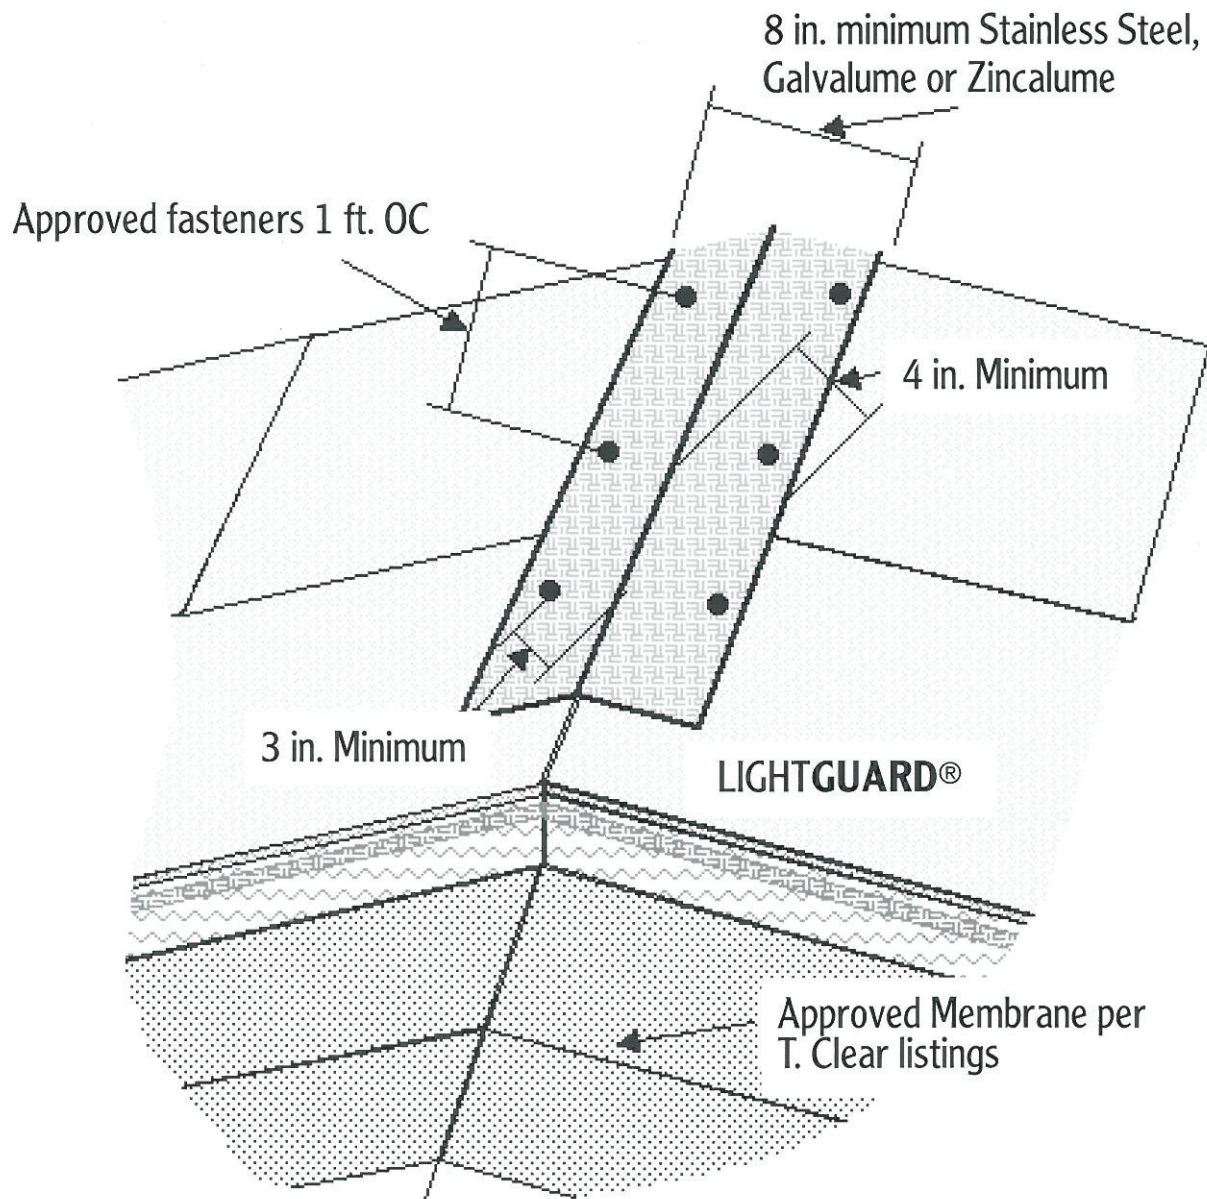

A minimum 8-in. wide metal strap, bent to conform to the angle change, is centered on the break line. The metal is secured to the LIGHTGUARD with approved fasteners spaced 1 ft. OC. The strap must extend a minimum of 4 in. onto the face of the LIGHTGUARD, with the fasteners secured a minimum of 3 in. from the edge of the LIGHTGUARD panel.

®LIGHTGUARD is a registered trademark of T. Clear Corporation