


Details

LIGHTGUARD® PMR System Sloped Metal Deck With Tapered Cricket For Fully-Adhered Membranes

Alternate strapping securement at a change of direction as described in Technical Data Sheet 4.3.2

Metal counterflashing securement as described in Technical Data Sheet 4.4

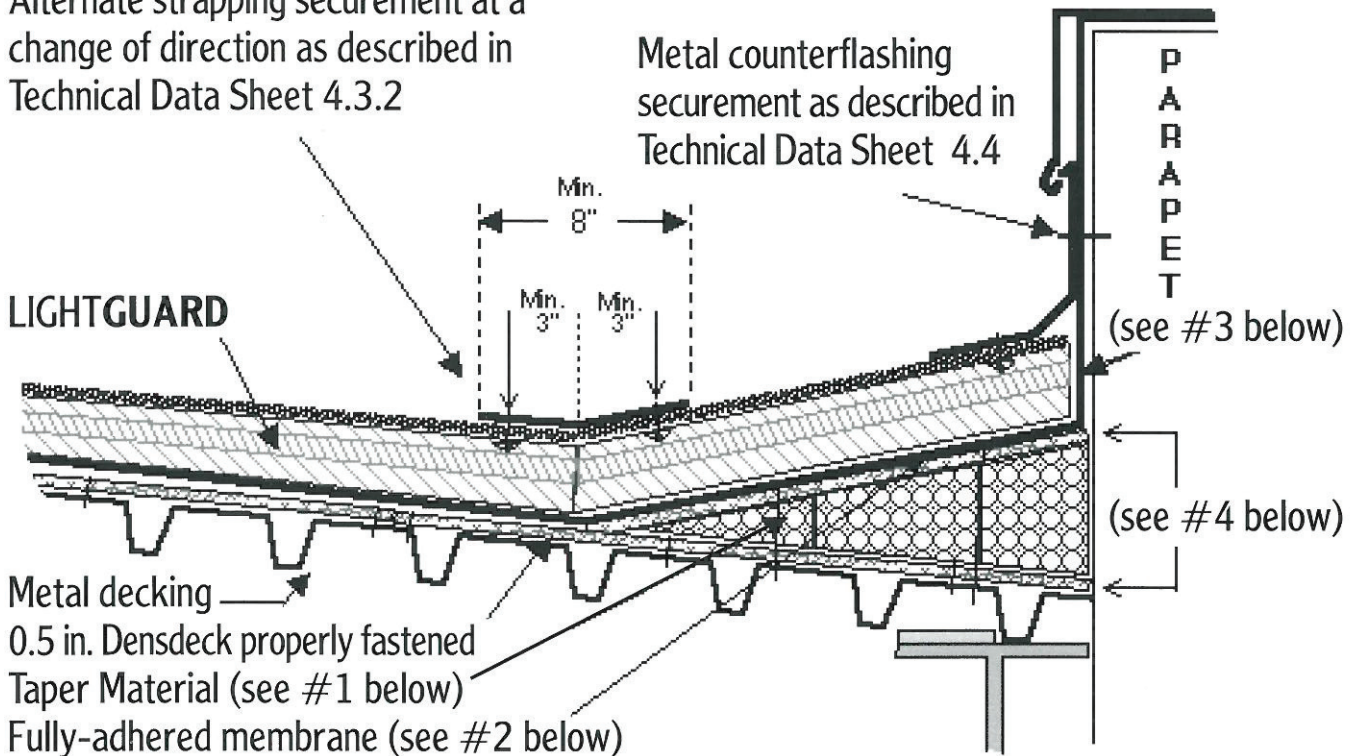

- #1) Taper material may be Foamglass, Perlite, plywood, metal, wood fiberboard, polystyrene foam (or equal) placed to deliver slope away from parapet and made of material that will contribute minimally to the insulation value of the deck structure.
- #2) Membranes consist of approved fully adhered membranes as recognized by T. Clear Corporation.
- #3) This is not a flashing detail specification. Consult specifications for approved manufacturer's adhered membranes.
- #4) Cricket slope should be a minimum of twice the approach slope.

®LIGHTGUARD is a registered trademark of T. Clear Corporation