


Cap Flashing

For WallGUARD® Concrete Faced Insulated Perimeter Wall Panels

T. Clear Corporation is pleased to offer a **UV stable rigid PVC*** cap flashing designed specifically for WallGUARD Concrete Faced Insulated Perimeter Wall Panels. The use of PVC results in no thermal bridging so the flashing will not take away from the insulation value of the WallGUARD panels or the wall assembly. The PVC design includes a drip edge to keep water from running down the face of the panels as well as providing for an aesthetically pleasing gray color that closely matches the natural color of the concrete facing on the WallGUARD panels. The Styrofoam® insulation is completely covered to prevent any UV degradation which would affect the integrity of the WallGUARD panel over time. The flashing comes in 8' lengths with 3/16" x 1/2" holes every 6" to screw or nail to your substrate. When securing the flashing to the substrate with either screws or nails make sure you leave the connection loose (1/32") to leave room for the slight expansion and contraction of the PVC material.

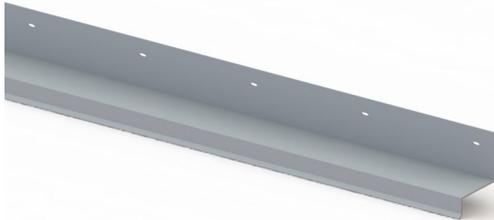

Properties	Value	Test
Izod Impact, ft lbs/in notch	20.6	D-792
Tensile Yield Strength, 10 ³ psi	6.5	D-256
Tensile Modulus, 10 ⁵ psi	3.9	D-638
Flexural Yield Strength, 10 ³ psi	12.7	D-790
Flexural Modulus, 10 ⁵ psi	4.2	D-790
DTUL at 264 psi, °C Un-anneal	67	D-648
ASTM Cell Classification	16343	D-1784

Part Dimensions	8' length (see profile dwg below)
Packaging **	(10) 8' pieces/Carton = 80 lf per Carton
Carton Dimensions & Weight	6"x6"x97" / 17 lbs Carton
Color	Gray
Fasteners	Not included

*Rimtec 45005C is designed for production of weather-resistant rigid profile extrusions, where good color retention and impact resistance, even after prolonged outdoor exposure, are required.

**Cap Flashing sold in Carton quantities only

